



ADLEEPPOWER®
SINCE 1974 ISO 9001

IE3 V3 Induction Motors

0.75KW TO 7.5KW



www.adlee.com

IE3 V3 Induction Motors

IEC V3 Induction Motor

All motors meet IEC international motor standards, convenience for all machines.


- Power range is from 0.75Kw to 7.5Kw, frame is from 80 to 132M.
- Voltages are designed as all customers' need. (Dual voltages are available)
- Motor frequency are available for 50HZ, 50/60HZ, 60HZ, and special frequency as needs.
- Base mount and Flange mount are available for all series.

Motor Specification

Model No.		80	90L	100L	112M	132S	132M
Input Volt		220/380VAC±10% 50 or 60HZ					
Pole		4P					
Output Power	(KW)	0.75	1.5	2.2	3.7	5.5	7.5
Rated Speed (RPM)	50HZ	1450	1450	1460	1460	1465	1470
	60HZ	1750	1760	1760	1760	1760	1760
Insulation		B Class					
Rated Torque (Kg-cm)	50HZ	49.8	100.2	148	248	372	510
	60HZ	41.6	83.4	124	206	310	411
Rated Current	50HZ	3.5A	6.2A	8.8A	14.1A	22A	28A
	60HZ	3.2A	5.6A	8.2A	14A	19.5A	26A
Max. Torque	(%)	380	380	360	360	330	330

Motor Dimensions


0.75KW & 2.2KW Flange mount Dimension

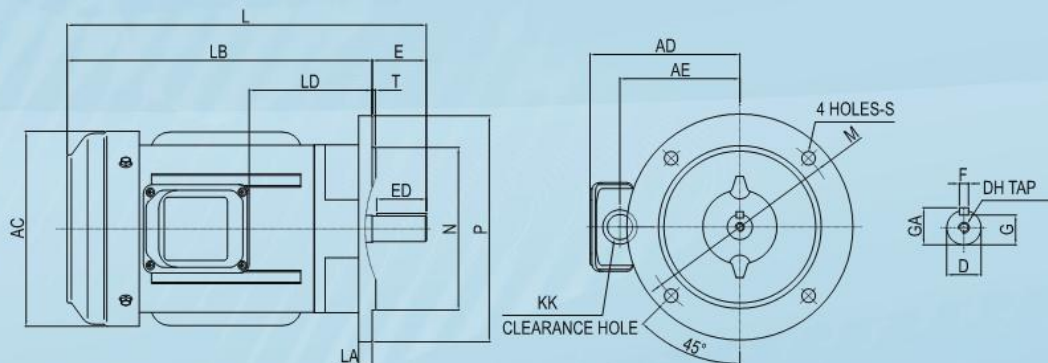

UNIT : mm

														UNIT : mm									
MODEL NO	AC	AD	AE	KK	L	LA	LB	LD	M	N	P	S	T	SHAFT END								BEARING	
														D	E	ED	F	G	GA	DH	TAP	FROENT	REAR
80	177	182	140	22	320	12	280	113	165	130	200	12	3.5	19	40	35	6	15.5	21.5	20	M6	6204ZZ	6203ZZ
100L	219	218	166	28	397.5	15	337.5	136	215	180	250	15	3.5	28	60	55	8	24	31	25	M10	6206ZZ	6206ZZ


◆ 1.5KW Flange mount Dimension

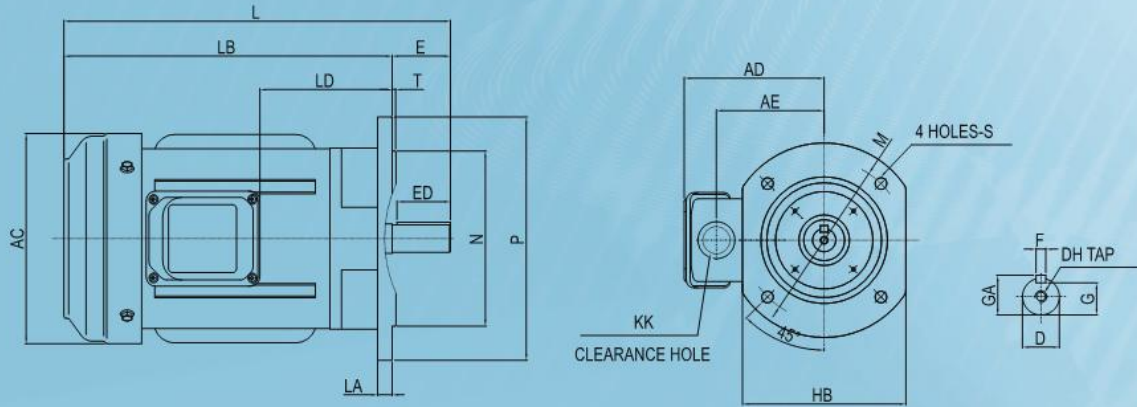

UNIT : mm

MODEL NO	AC	AD	AE	HB	KK	L	LA	LB	LD	M	N	P	S	T	SHAFT END								BEARING	
															D	E	ED	F	G	GA	DH	TAP	FROENT	REAR
90L	195	144	111	168	22	380.5	14	330.5	135	165	130	200	12	3.5	24	50	45	8	20	27	24	M8	6205ZZ	6205ZZ


◆ 3.7KW ~ 7.5KW Flange mount Dimension

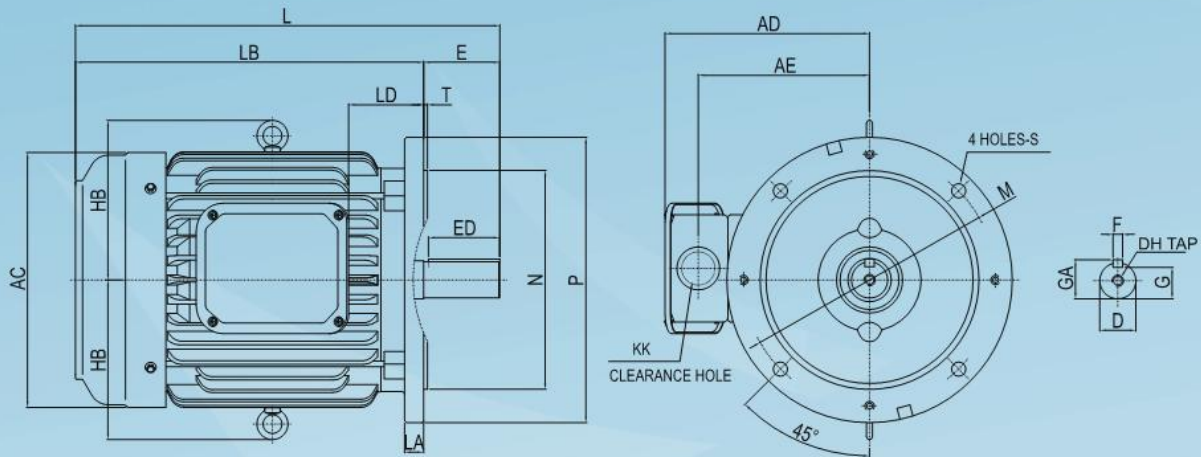

UNIT : mm

MODEL NO	AC	AD	AE	HB	KK	L	LA	LB	LD	M	N	P	S	T	SHAFT END								BEARING	
															D	E	ED	F	G	GA	DH	TAP	FROENT	REAR
112M	238	182	149	150	28	422	15	362	135	215	180	250	15	4	28	60	55	8	24	31	25	M10	6306ZZ	6306ZZ
132S	273	218	175	169	35	446	20	366	97	265	230	300	15	4	38	80	75	10	33	41	25	M12	6308ZZ	6306ZZ
132M	273	218	175	169	42	484	20	404	116	265	230	300	15	4	38	80	75	10	33	41	25	M12	6308ZZ	6306ZZ

◆ 0.75KW & 1.5KW Base mount Dimension

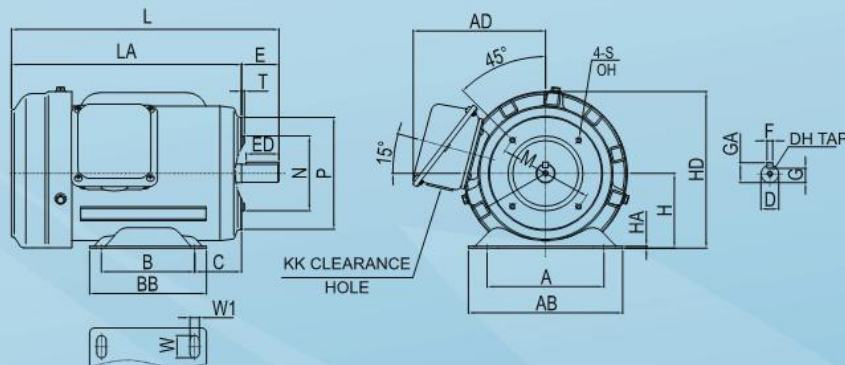


UNIT : mm

																					SHAFT END										BEARING		
MODEL NO	A	AB	AD	B	BB	C	H	KK	L	LA	M	N	P	S	OH	T	W	W1	HA	D	E	ED	F	G	GA	DH	TAP	FROENT	REAR				
80	125	165	141.5	100	125	50	80	22	286	246	100	80	120	M6	15	3	24	10	2.3	19	40	35	6	15.5	21.5	20	M6	6204ZZ	6204ZZ				
90L	140	176	151	125	149	56	90	22	337	287	115	95	140	M8	16	3	20	10.5	2.6	24	50	45	8	20	27	24	M8	6205ZZ	6205ZZ				

Motor Dimensions


◆ 2.2KW Base mount Dimension

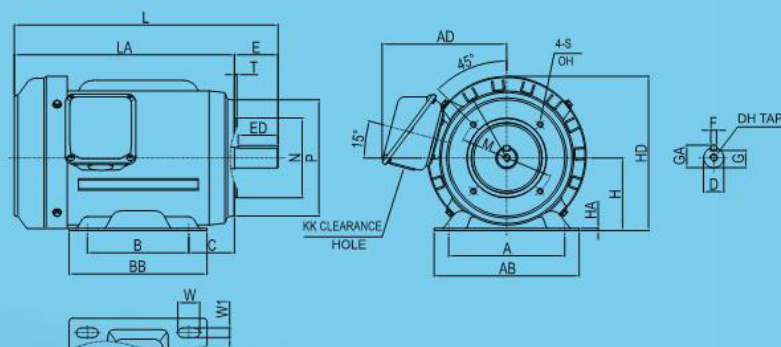

UNIT : mm

MODEL NO	A	AB	AD	B	BB	C	H	KK	L	LA	M	N	P	S	OH	T	W	W1	HA	SHAFT END								BEARING	
																				D	E	ED	F	G	GA	DH	TAP	FROENT	REAR
100L	160	200	172	140	190	63	100	28	363.5	303.5	130	110	160	M8	16	3.5	30	13	3	28	60	55	8	24	31	25	M10	6206ZZ	6206ZZ

◆ 3.7KW ~ 7.5KW Base mount Dimension

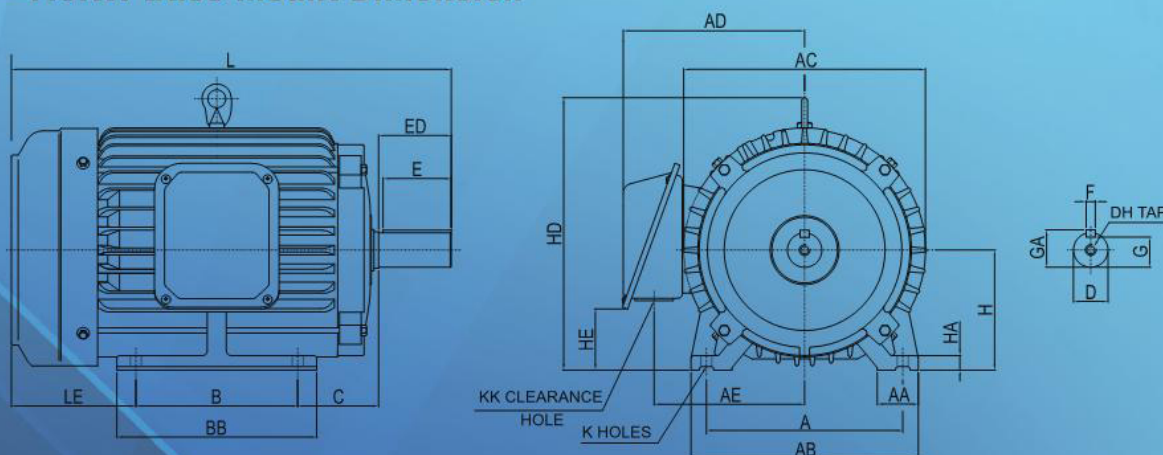

UNIT : mm

MODEL NO	A	AA	AB	AC	AD	AE	B	BB	C	H	HA	HD	HE	K	KK	L	LE	SHAFT END								BEARING	
																		D	E	ED	F	G	GA	DH	TAP	FROENT	REAR
112M	190	45	224	238	182	149	140	175	70	112	15	265	82	12	28	382	112	28	55	60	8	24	31	25	M10	6306ZZ	6306ZZ
132S	216	45	250	273	218	175	140	180	89	132	16	310	83	12	35	446	137	38	75	80	10	33	41	25	M12	6308ZZ	6306ZZ
132M	216	45	250	273	218	175	178	212	89	132	16	310	83	12	35	484	137	38	75	80	10	33	41	25	M12	6308ZZ	6306ZZ

High Performance & Powerful



愛德利
SINCE 1974
ISO 9001:2015

SHUNYANG ELECTRICAL MACHINERY MANUFACTURE CO., LTD

廣州市順揚機電有限公司

(台灣愛德利科技股份有限公司中國授權商標使用及專業製造商)

廣東：廣東省廣州市增城區新塘鎮白江村田嚇把嶺3路8號首層

NO.8 XIAPAILING ROAD, XINTANG TOWN, ZHENCHENG BROUGH, GUANGZHOU CITY, GUANGDONG PROVICE, CHINA.

电话 (TEL) : +86-20-32371818 传真 (FAX) : +86-20-32371828 E-MAIL : ADLII@QQ.COM

