



ADLEEPPOWER®
SINCE 1974 ISO 9001

IPM

High
Performance
& Powerful
AC drives



www.adlee.com

IPM AC drives

High Performance & Powerful



Innovated Features

A. New Technology Super Low Noise

Improve soft/hard ware. optimum waveform. The motor as quiet as running with commercial power.

B. All Model Equipped With IPM

Employ IPM (intelligent power module) for power device. IPM provides numerous advantages such as quiet operation, high efficiency, high torque smoother shaft rotation and improved reliability.

C. Expansion Of Frequency Range

The range of variable frequency has been greatly extended from 0.5HZ-2400HZ. and S curve for smooth ACC/DEC.performance.

D. Upgrading V/F Characteristic

Provide constant torque curve (F^1) reduce torque curve (F^2) and (F^3) for FAN/PUMP drive. adjustable saving energy operation and wide basic voltage setting from 30HZ-2400HZ. Double V/F curve performance.

E. Enhanced I/O Function

Built-in variable digital/analog input functions and RS-485 communication to suit a wide array of needs. easy to install. convenient humanity operating features.

F. Compact structure

Compact size design make installation easier, it solves space limited problem.

G. Extended braking resistor available

All series with extended braking resistor terminals. It makes machine more reliable in high frequency switching RUN/STOP or High speed/Low speed situation.

H. Cycle timing function

All series are with cycle timing function for special purpose option.

Not only cost down but also using friendly for Timer model replacing general purpose AC drive with PLC.

Model Explanation

AS 4 - 3 04 H

- Special function H: 2400HZ
- Applicable motor capacity (KW): 04:0.4 07:0.75
15:1.5 22:2.2 37:3.7
- Phase 1:1Ø 3:3Ø
- Input Voltage(VAC) 1:110 2:220 4:380/440
- Series AS, MS, HS

Multi function general purpose inverter

Hi Torque, Varied Speed, Low Noise, Compact Size, Hi Efficiency

MS Series Specification

Model	MS1		MS2						MS4			
Input Voltage	1Ø 110VAC ±10%		1Ø 220VAC ±10%						3Ø 380/440VAC ±10%			
Model No	104	107	102	104	107	115	122	137	307	315	322	337
Input Frequency	50-60HZ ±10%		50-60HZ ±10%						50-60HZ ±10%			
Output Voltage	3Ø220VAC		3Ø220VAC						3Ø380/440VAC			
Output Frequency	0.5-1200HZ		0.5-1200HZ						0.5-1200HZ			
Rated Current (A)	2.5	4.1	1.4	2.5	4.1	7.0	10	16	2.5	4	6	9
Capacity (KVA)	1.0	1.6	0.6	1.0	1.6	2.7	3.8	6.1	1.9	3.1	4.2	6.9
Largest Motor (4poles)(KW)	0.4	0.75	0.2	0.4	0.75	1.5	2.2	3.7	0.75	1.5	2.2	3.7
Control Method	SINWAVE PWM		SINWAVE PWM						SINWAVE PWM			
Cooling Method	Self-Cooled	Air-Cooled	Self-Cooled		Air-Cooled		Air-Cooled		Air-Cooled			
Weight (KG)	1.2	1.3	1.2	1.2	1.3	1.3	1.4	4.0	1.3	1.3	1.3	4.0
Dimension Drawing(mm)	1	2	1	1	1	2	2	3	4	4	4	3

AS Series Specification

Model	AS1-N		AS2-N										AS4-N			
Input Voltage	1Ø 110VAC ±10%		1Ø 220VAC ±10%					3Ø 220VAC ±10%					3Ø 380/440VAC ±10%			
Model No	104	107	104	107	115	122	137	304	307	315	322	337	307	315	322	337
Input Frequency	50-60HZ ±10%		50-60HZ ±10%					50-60HZ ±10%					50-60HZ ±10%			
Output Voltage	3Ø220VAC		3Ø220VAC					3Ø220VAC					3Ø380/440VAC			
Output Frequency	0.5~400HZ (ASNH up to 2400HZ)															
Rated Current (A)	2.5	4.1	2.5	4.1	7.0	10	16	3.0	5.0	8.0	11	17	2.5	4.0	6.0	9.0
Capacity (KVA)	1.0	1.6	1.0	1.6	2.7	3.8	6.1	1.1	1.9	3.1	4.2	6.5	1.9	3.1	4.2	6.9
Largest Motor (4poles)(KW)	0.4	0.75	0.4	0.75	1.5	2.2	3.7	0.4	0.75	1.5	2.2	3.7	0.75	1.5	2.2	3.7
Control Method	SINWAVE PWM		SINWAVE PWM					SINWAVE PWM					SINWAVE PWM			
Cooling Method	Self-Cooled	Air-Cooled	Self-Cooled	Air-Cooled				Self-Cooled	Air-Cooled				Air-Cooled			
Weight (KG)	1.2	1.3	1.2	1.3	1.3	1.4	4.2	1.2	1.3	1.3	1.4	4.2	1.3	1.3	1.4	4
Dimension Drawing(mm)	4	5	4	4	5	5	3	4	4	5	5	3	5	5	5	3

HS Series Specification

Model	HS2										HS4			
Input Voltage	1Ø 220VAC ±10%					1Ø 220VAC ±10%					3Ø 380/440VAC ±10%			
Model No	104	107	115	122	137	304	307	315	322	337	307	315	322	337
Input Frequency	50-60HZ ±10%					50-60HZ ±10%					50-60HZ ±10%			
Output Voltage	3Ø220VAC					3Ø220VAC					3Ø380/440VAC			
Rated Current (A)	2.5	4.1	7.0	10	16	3.0	5.0	8.0	11	17	2.5	4.0	6.0	9.0
Capacity (KVA)	1.0	1.6	2.7	3.8	6.1	1.1	1.9	3.1	4.2	6.5	1.9	3.1	4.2	6.9
Largest Motor (4poles)(KW)	0.4	0.75	1.5	2.2	3.7	0.4	0.75	1.5	2.2	3.7	0.75	1.5	2.2	3.7
Control Method	SINWAVE PWM					SINWAVE PWM					SINWAVE PWM			
Cooling Method	Self-Cooled	Air-Cooled				Self-Cooled	Air-Cooled				Air-Cooled			
Weight (KG)	1.2	1.3	1.3	1.4	4.2	1.2	1.3	1.3	1.4	4.2	1.3	1.3	4	4.2
Dimension Drawing(mm)	9	9	10	10	3	9	9	10	10	3	10	10	10	3

※HS series is a special model for pump application. The water pressure sensor signal can input to driver directly. The driver will adjust the motor speed automatically to have constant water pressure performance. The pressure can be set on panel.

Characteristic

- All models with F306 remote control option.
- Remote 3 wire start/stop, jogging, forward/reverse, multi-function control.
- Multistep speed operation (up to eight speeds).
- S-character accel/deceleration selection enables smooth start/stop.
- 0-5V, 0-10V, 4-20mA, analog signal control.
- Fully adjustable V/F characteristic.
- Arrival/running/fault alarm signal output.
- RS-485 Communication port.
- Adjustable carrier frequency.
- Program security lock.
- Fault Relay Contact rating 1A 240VAC or 1A 30VDC.
- Max./Min. frequency limiter.
- Inverter protection history stores up to four previous protective actions.
- Master/slave driver system.
- Multi-analog function extended control.
- All series with braking circuit.
- Full of excellent protection system.

AP4 Series Specification

Model	AP4G3 · AP4H3						
Input Voltage	3Ø 380/440VAC ±10%						
Model No	337	355	375	3110	3150	3185	3220
Input Frequency	50HZ / 60HZ ±5%						
Output Voltage	3Ø 380/440VAC						
Output Frequency	0.5HZ ~ 400HZ (AP4H3 Up To 2400HZ)						
Rated Current (A)	8.5	12	16.5	23	31	38	45
Capacity (KVA)	6.5	9.2	12.6	17.6	23.6	29	34
Largest Motor (4poles) (KW)	3.7	5.5	7.5	11	15	18.5	22
Control Method	Sine wave pulse width modulation						
Cooling Method	Air-Cooled						
Weight (KG)	5.5	6.2	6.6	6.8	18	18.5	19.5
Dimension (mm)	6			7			



AP2 Series Specification

Model	AP2G3 · AP2H3						
Input Voltage	3Ø 220VAC ±10%						
Model No	337	355	375	3110	3150	3185	3220
Input Frequency	50HZ / 60HZ ±5%						
Output Voltage	3Ø 220VAC						
Output Frequency	0.5HZ ~ 400HZ (AP2H3 Up To 2400HZ)						
Rated Current (A)	17	24	33	46	61	76	90
Capacity (KVA)	6.5	9.2	12.6	17.6	23.3	29	34
Largest Motor (4poles) (KW)	3.7	5.5	7.5	11	15	18.5	22
Control Method	Sine wave pulse width modulation						
Cooling Method	Air-Cooled						
Weight (KG)	5.5	6.2	6.6	17	18	18.5	19
Dimension (mm)	6			7			

Multi function general purpose inverter

Hi Torque, Varied Speed, Low Noise, Compact Size, Hi Efficiency

Dimension

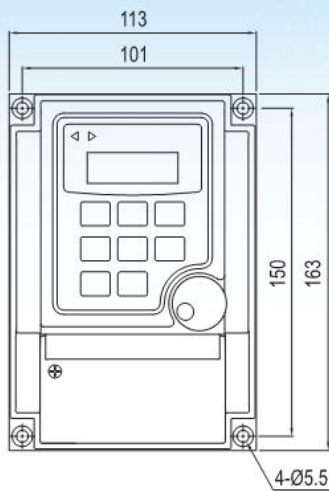


FIG-1

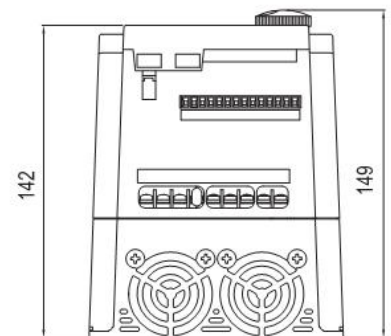
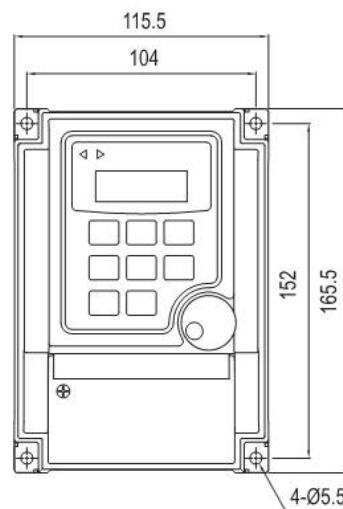
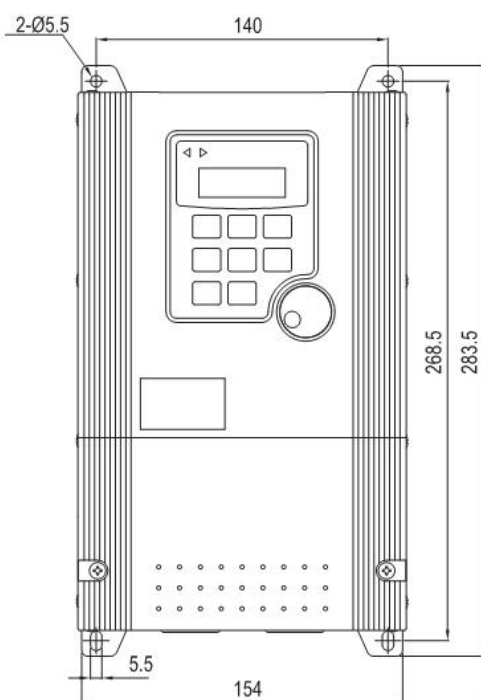



FIG-2

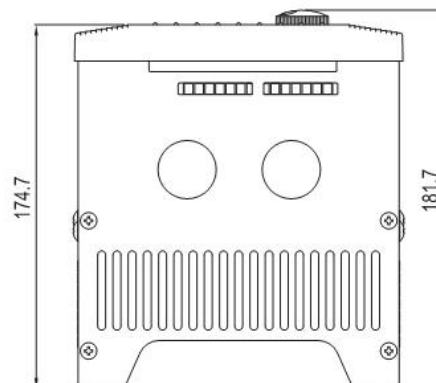


FIG-3

Dimension

FIG-4

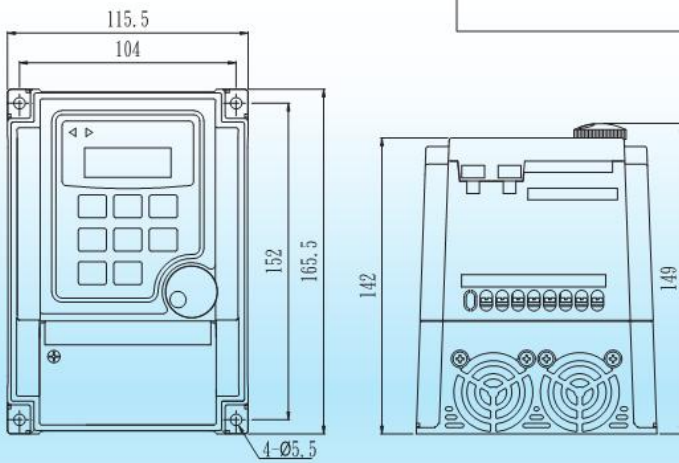
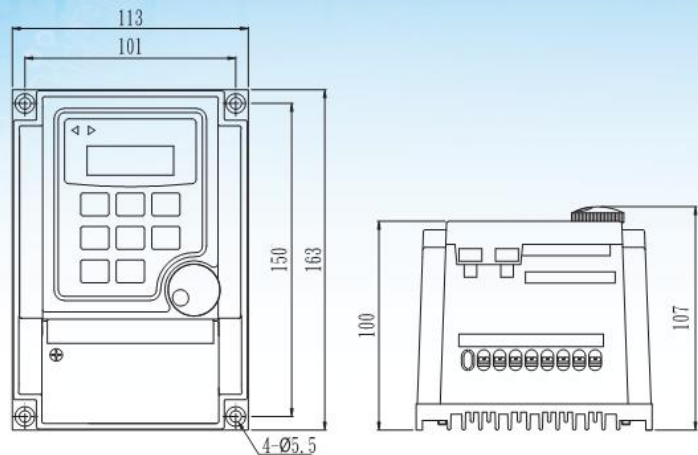


FIG-5

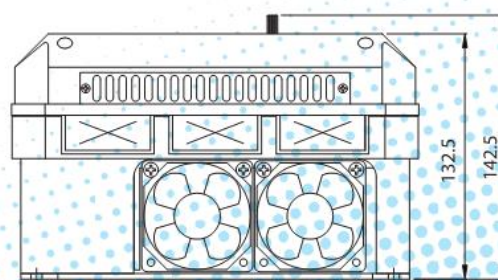
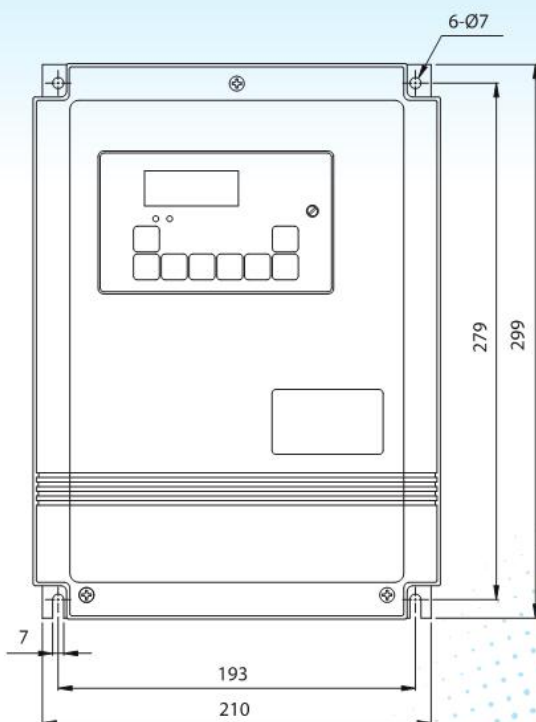


FIG-6

[Multi function general purpose inverter]

Hi Torque, Varied Speed, Low Noise, Compact Size, Hi Efficiency

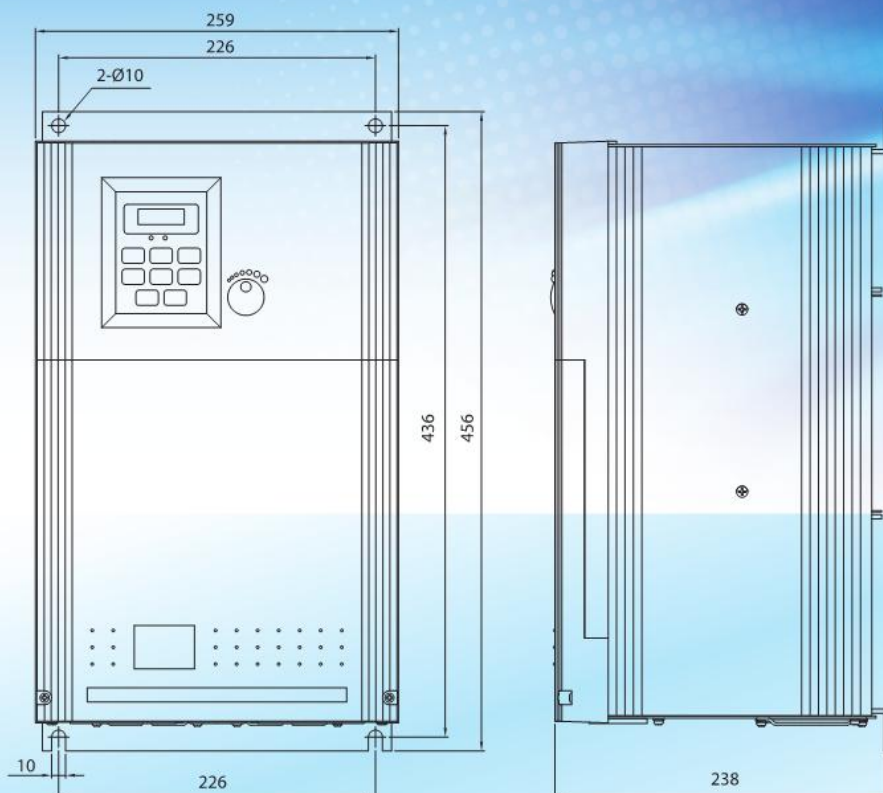


FIG-7



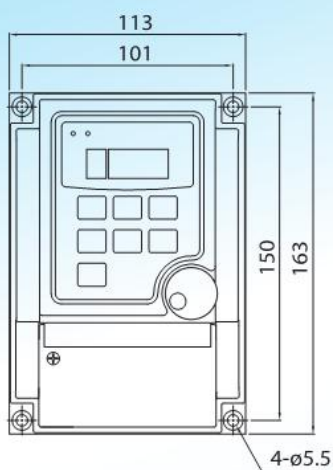


FIG-9

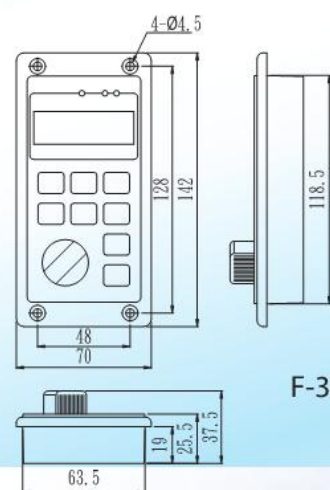

F-306

FIG-8





FIG-10

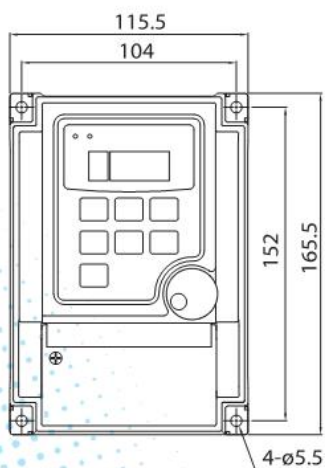

High Performance
& Powerful

SHUNYANG ELECTRICAL MACHINERY MANUFACTURE CO., LTD

廣州市順揚機電有限公司

(台灣愛德利科技股份有限公司中國授權商標使用及專業製造商)

廣東：廣東省廣州市增城區新塘鎮白江村田嚇耙嶺3路8號首層

NO.8 XIAPAILING ROAD, XINTANG TOWN, ZHENCHENG BROUGH, GUANGZHOU CITY, GUANGDONG PROVCE, CHINA.

电话 (TEL) : +86-20-32371818 传真 (FAX) : +86-20-32371828 E-MAIL : ADLII@QQ.COM



愛德利®
SINCE 1974
ISO 9001:2015

